PP2 COMPRESSOR CONFIGURATION

Who fills in?

Company name:

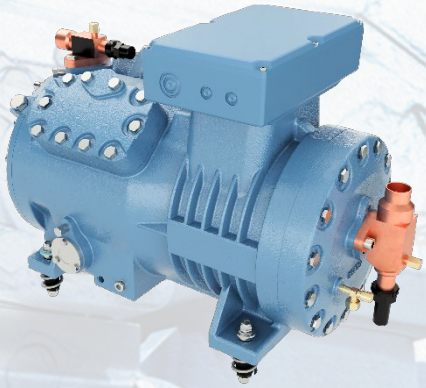

Select compressor model (L + H motor)

Select compressor model

Standard Extent of Delivery: •suction & discharge shut-off valve •pressure relieve valve •sight glass •lubrication oil charge •motor PTC temperature sensor •motor protector (to be mounted in separate box) •IP54 electrical box •nitrogen protection •kit bridges D.O.L. start •rubber vibration dampers

Motor voltage:

- ◯ **400 Y - 230 D/3/50Hz - 460/3/60Hz Y (standard)**
- ◯ **Motor with special voltage (contact SRMTec)**

Additional accessories

- ☐ Motor with special voltage
- ☐ Motor with DUAL voltage
- ☐ Additional fan (from 4 cyl.)
- ☐ Opto-electronic oil level sensor
- ☐ Crankcase heater
- ☐ Start unloader device (SU)+ discharge temperature sensor (from 4 cyl.)
- ☐ Discharge temperature sensor
- ☐ Oil & Gas equalizing fittings for parallel operation
- ☐ 1 x Capacity control head with coil (from 4 cyl.)
- ☐ 1 x Capacity control head with Atex coil (from 4 cyl.)
- ☐ Special wooden package

Customer Notes