RS5 COMPRESSOR CONFIGURATION

Who fills in?

Company name:

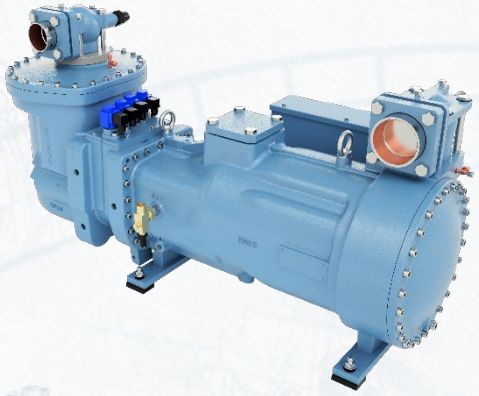

Select compressor model:

Select compressor model

Standard Extent of Delivery: •discharge shut-off valve •suction bushing •auto Vi: built-in variable Vi=2,6÷3,5 •actiFlow: automatic control of the oil circulating inside the compressor •integrated discharge check valve •integrated safety relief valve •flanged-on centrifugal oil separator •electronic protection device INT69SNY •discharge temperature sensor •oil sight glasses •electrical box with IP54 enclosure class •nitrogen protective charge •rubber vibration dampers •oil filter •oil charge/ drain valve •oil charge POE170 •electrical motor with 6 PTC temperature sensors embedded •kit oil cooling connection •kit conversion from step to stepless capacity control •kit conversion from stepless to step capacity control

Motor voltage:

◯ **400/3/50Hz - 460/3/60Hz YD (standard)**

◯ **Motor with special voltage (contact SRMTec)**

Capacity control:	◯ **L4/LZ**	◯ **L0**
Suction bushing:	◯ **copper tube**	◯ **steel tube**
Discharge shut-off valve:	◯ **copper tube**	◯ **steel tube**

Additional accessories:

- ☐ Motor with special voltage
- ☐ Kit connection for liquid injection without solenoid valve
- ☐ Kit ECO connection with shut-off valve
- ☐ Opto-electronic oil level sensor
- ☐ Suction shut-off valve
- ☐ Kit oil flow switch
- ☐ Kit bridges for D.O.L. start
- ☐ Extra for not STD connection
- ☐ Special wooden package

Customer Notes: