RW5 COMPRESSOR CONFIGURATION

Who fills in?

Company name:

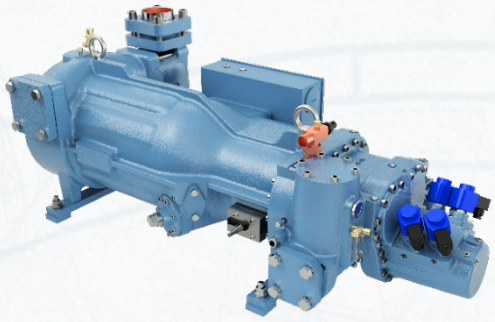

Select compressor model:

Select compressor model

Standard Extent of Delivery: •suction & discharge shut-off valve •built-in volumetric ratio Vi=4,0 •discharge temperature sensor •integrated discharge check valve •integrated safety relief valve •3 step partial load control (for RW5-L020÷L075 + RW5-H030÷H90 - 4 step and/or stepless partial load control for RW5-L090÷L150) •pressure relieve valve •motor PTC temperature sensor •motor protector INT69SNY •IP54 electrical box •nitrogen protection •rubber vibration damper •oil circuit kit (solenoid valve, changeable oil filter, oil flow switch, sight glass, INT69VS elec. protection module, and capacitor)

Motor voltage:

◯ **400/3/50Hz - 460/3/60Hz PW**	**400/3/50Hz - 460/3/60Hz YD (standard)**
•RW5-L020÷L075 + •RW5-H030÷H90	**•RW5-L090÷L150 + •RW5-H110÷H180**

◯ **Motor with special voltage (contact SRMTec)**

Capacity control: ◯ **L4/LZ** ◯ **L0**

Suction bushing: ◯ **copper tube*** ◯ **steel tube***

Discharge shut-off valve: ◯ **copper tube*** ◯ **steel tube***

See dimensions in appendix

Additional accessories

- ☐ Motor with special voltage
- ☐ Motor with DUAL voltage (RW5-L020÷L075/RW5-H030÷H090)
- ☐ Adapter for liquid injection
- ☐ Adapter&Shut-off valve for ECO connection
- ☐ Oil flow switch (from RW5-L060 and RW5-H070)
- ☐ Oil filter differential pressure switch (from RW5-L060 and RW5-H070)
- ☐ Kit bridges for D.O.L. start
- ☐ Vi adjust device Automatic (RW5-L090÷L155/RW5-H110÷H180)
- ☐ Extra for not STD connection**
- ☐ Special wooden package

Customer Notes:

Connection dimensions

MODELS		SUCTION CONNECTIONS					DISCHARGE CONNECTIONS			
		STANDARD	OPTION**	OPTION**	OPTION**	OPTION**	STANDARD	OPTION**	OPTION**	OPTION**
RW5-L020	**RW5-H030**	Ø54mm	○ Ø42mm	○ Ø67mm			Ø42mm	○ Ø35mm		
RW5-L025	**RW5-H035**	Ø54mm	○ Ø42mm	○ Ø67mm			Ø42mm	○ Ø35mm		
RW5-L030	**RW5-H040**	Ø54mm	○ Ø42mm	○ Ø67mm			Ø42mm	○ Ø35mm		
RW5-L040	**RW5-H050**	Ø54mm	○ Ø42mm	○ Ø67mm			Ø42mm	○ Ø35mm		
RW5-L050	**RW5-H060**	Ø54mm	○ Ø42mm	○ Ø67mm			Ø42mm	○ Ø35mm		
RW5-L060	**RW5-H070**	Ø80mm	○ Ø67mm	○ Ø76mm	○ Ø89mm	○ Ø92mm	Ø54mm	○ Ø67mm		
RW5-L070	**RW5-H080**	Ø80mm	○ Ø67mm	○ Ø76mm	○ Ø89mm	○ Ø92mm	Ø54mm	○ Ø67mm		
RW5-L075	**RW5-H090**	Ø80mm	○ Ø67mm	○ Ø76mm	○ Ø89mm	○ Ø92mm	Ø54mm	○ Ø67mm		
RW5-L090	**RW5-H110**	Ø92mm	○ Ø67mm	○ Ø76mm	○ Ø80mm	○ Ø89mm	Ø67mm	○ Ø54mm		
RW5-L100	**RW5-H120**	Ø92mm	○ Ø67mm	○ Ø76mm	○ Ø80mm	○ Ø89mm	Ø67mm	○ Ø54mm		
RW5-L110	**RW5-H140**	Ø92mm	○ Ø67mm	○ Ø76mm	○ Ø80mm	○ Ø89mm	Ø67mm	○ Ø54mm		
RW5-L125	**RW5-H160**	Ø92mm	○ Ø67mm	○ Ø76mm	○ Ø80mm	○ Ø89mm	Ø80mm	○ Ø54mm	○ Ø67mm	○ Ø76mm
RW5-L140	**RW5-H170**	Ø92mm	○ Ø67mm	○ Ø76mm	○ Ø80mm	○ Ø89mm	Ø80mm	○ Ø54mm	○ Ø67mm	○ Ø76mm
RW5-L150	**RW5-H180**	Ø92mm	○ Ø67mm	○ Ø76mm	○ Ø80mm	○ Ø89mm	Ø80mm	○ Ø54mm	○ Ø67mm	○ Ø76mm